




CJ650B/8.1

SERVICE BULLETIN – CJ650B Handle bar control adjustment.

The handlebars on the CJ650B have a wide range of adjustment to cater for different riding position preferences and riding conditions. The handlebars are marked within the range of adjustment for easy reference.

Adjustment of the handlebars is made by loosening the 4 x 6mm allen head bolts and rotating the handlebar. After the handlebars have been rotated the clutch and brake levers will need to be re-indexed. This is done as follows –

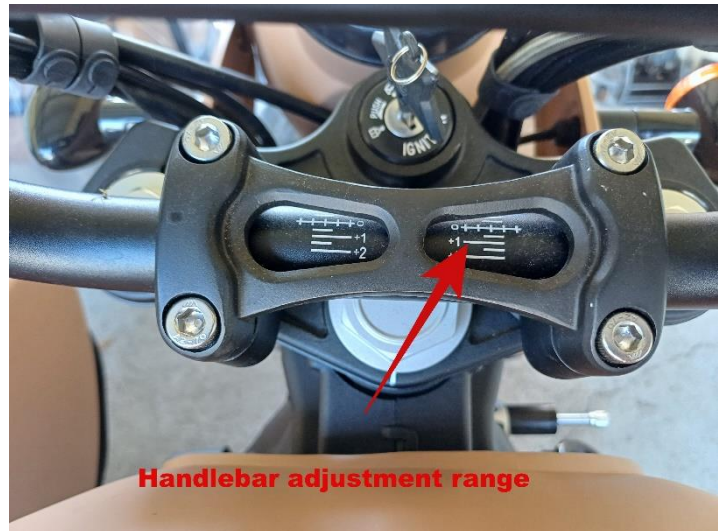

Left control – Clutch

Loosen the 5mm allen head bolts on the clutch lever bar clamp slightly. Usually it is only necessary to loosen the top bolt to allow the clutch lever and bracket to be rotated to the desired condition. Retighten





Right Control- Brake

Loosen the 5mm Allen head bolt on the brake lever clamp, and rotate the brake lever to the desired condition. Retighten.



Note:

Both the left and right handlebar electrical switches are fitted with a locating pin that locks the switches to the handlebar preventing them from rotating. Do not force the switches by trying to rotate them as damage to the switch will occur. Generally the positioning of the switches allows for easy operation of the switches throughout the adjustment range of the handlebars.

If the electrical switches need to be re-indexed it will be necessary to completely remove the switches and accurately drill a new additional locating hole in the handlebars to accommodate the locating pin.

